

Rec'd PCT/PTO 24 JUN 2004

PATENTTI- JA REKISTERIHALLITUS
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 5.2.2003

PCT/FI 02 / 0 1 0 3 6

REC'D 19 FEB 2003

ETUOIKEUSTODISTUS
PRIORITY DOCUMENT



Hakija
Applicant

Outokumpu Oyj
Espoo

Patenttihakemus nro
Patent application no

20012582

Tekemispäivä
Filing date

28.12.2001

Kansainvälinen luokka
International class

B22D

Keksinnön nimitys
Title of invention

"Apparatus for continuous casting of metal strips"
(Laite metallinauhujen jatkuvaan valuun)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä Patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Kristina Laukkas
Kristina Laukkas
Tarkastaja

Maksu 50 €
Fee 50 EUR

Maksu perustuu kauppa- ja teollisuusministeriön antamaan asetukseen 1027/2001 Patentti- ja rekisterihallituksen maksullisista suoritteista muutoksineen.

The fee is based on the Decree with amendments of the Ministry of Trade and Industry No. 1027/2001 concerning the chargeable services of the National Board of Patents and Registration of Finland.

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328
FIN-00101 Helsinki, FINLAND

APPARATUS FOR CONTINUOUS CASTING OF METAL STRIPS

This invention relates to apparatus for continuous vertical casting of metal strips and more particularly to apparatus of the kind comprising: a mould having top
 5 and bottom ends an open-ended mould cavity with a mould entrance opening at the top end and a strip exit opening at the bottom end, a tundish for holding molten metal, said tundish having a discharge opening in direct communication with the mould cavity to feed molten metal into the mould entrance opening past
 10 an interface between the tundish and the mould, a sealing device forming a seal at said tundish-mould interface to prevent molten metal from entering said interface, and a molten-metal feeding device for supplying molten metal to the tundish and maintaining a level of molten metal therein.

US 3 797 555 A discloses continuous-casting apparatus of this kind. An
 15 important feature of such apparatus is that the mould has what is often referred to as a hot top, meaning that the level of the surface of the molten metal within the casting apparatus is substantially higher, namely within the tundish, than the level where the solidification of the molten metal against the chilled walls of the
 20 mould cavity is initiated.

In hot top continuous-casting apparatus there is thus a contiguous body of molten metal extending from some level within the tundish down to a level lower than the level within the mould cavity where solidification of the molten metal is initiated. Accordingly, there is no point within the mould cavity where the
 25 atmosphere can interfere with the solidification of the metal. Another advantage of the hot top casting technique is in the higher metallostatic pressure resulting from having the level of the molten metal in the tundish, rather than somewhere within the mould.

30 For the reliable operation of the casting apparatus and maintenance of a high quality of the cast, it is necessary to provide a reliable sealing at the tundish-mould interface, that is, at the point where the molten metal continuously fed

into the mould flows through the discharge opening of the tundish and enters the mould cavity. Providing a reliable sealing is particularly difficult in casting apparatus where the mould is oscillated to facilitate the movement of the solidified metal through the mould cavity. It is also difficult to provide the large
5 sealing surfaces, which are essential for a reliable sealing.

An object of the invention is to provide a reliable sealing device at the tundish-mould interface in casting apparatus of the kind described above.

10 In accordance with the invention a continuous-casting apparatus of the kind indicated initially is characterised in that the sealing device comprises: an upwardly facing horizontal flat sealing element support surface on the mould at the top end thereof, said sealing element support surface extending about the mould entrance opening, a flat downwardly facing surface on the tundish, said
15 downwardly facing surface extending about the discharge opening of the tundish, and a sealing element formed of a sheet of graphite and being in constant sealing engagement with both said horizontal sealing element support surface on the mould and said downwardly facing surface of the tundish, said sealing element extending about the mould entrance opening and the discharge
20 opening of the tundish .

In the apparatus according to the invention, the sealing at the tundish-mould interface is accomplished by means of a very simple and inexpensive sealing device with a sealing element interposed between a pair of flat horizontal
25 surfaces, one on the tundish and the other on the mould. The tundish and the metal it holds apply the pressure required for the sealing. If the mould is oscillated vertically, the tundish can easily be arranged to oscillate together with the mould. If the mould is additionally oscillated horizontally, the horizontal
oscillations need not include the tundish, because the tundish and the mould
30 can slide horizontally relative to one another on the sealing element without impairing the sealing effect of the sealing device.

The invention will be described in greater detail below with reference to the accompanying drawings in which an embodiment of the continuous-casting mould according to the invention is diagrammatically illustrated.

- 5 Fig. 1 is a view in vertical section along line I-I of Fig. 2 of a continuous-casting apparatus embodying the invention, the apparatus including a mould and a tundish with associated means for supplying molten metal;

Fig. 1A shows a portion of Fig. 1 drawn to a larger scale to more clearly
10 illustrate the lower portion of the tundish and the upper portion of the mould as well as an interposed sealing device;

Fig. 2 is a plan view of the apparatus shown in Fig. 1 with the portion of the tundish overlying the mould omitted; and

15

Fig. 3 is a view in vertical section along line III-III of Fig. 2.

In the embodiment of the invention shown by way of example in the drawings, a continuous-casting mould 10 is used for the vertical casting of metal strips, especially strips of non-ferrous metals or alloys, such as copper and copper
20 base alloys. Molten metal to be cast in the mould 10 is continuously fed from a feed head or tundish 11 into a vertically extending mould cavity C through a rectangular elongate mould entrance opening E at the top end of the mould. As the metal proceeds downwardly in the mould cavity, it solidifies to form a solid
25 strand in the shape of a strip S that exits through a discharge opening at the bottom end of the mould. Beneath the mould 10 the solidified strip S passes between withdrawal rolls R, which operate to withdraw the strip from the mould at a constant rate.

30 The tundish 11 receives the molten metal from a furnace (not shown) through a launder 12 (only partially shown) including a conventional stopper rod 13 for controlling the flow into the tundish such that a substantially fixed level of molten

metal is maintained in the tundish. This flow control can be carried out using conventional techniques and need not be described.

More particularly, the molten metal is fed into the mould 10 through a rectangular outlet opening 11A which is formed in the flat, horizontal bottom side 11B of the tundish 11 and substantially coextensive with the mould entrance opening E. As will be described in more detail below, the tundish 11 rests on a flat, horizontal top surface 10A of the mould 10 through the intermediary of a sealing device 14. This sealing device serves to prevent the molten metal from escaping laterally at the tundish-mould interface formed by the said top surface 10A of the mould and the said bottom surface 11B of the tundish 11, i.e. that flat horizontal surface that surrounds the outlet opening 11A.

In operation of the illustrated continuous-casting apparatus, the mould 10 is mounted between a pair of mounting blocks M of a casting machine, which may be of conventional design. The mould 10 proper comprises a pair a pair of spaced-apart wide side walls, generally designated by 15, and a pair of narrow end walls 16 formed of a pair of graphite bars and bridging the gap between the confronting inner sides of the side walls 15 so that the side and end walls 15, 16 jointly define the mould cavity C. Fig. 2 clearly shows the rectangular shape of the mould cavity C as viewed in the direction the cast metal moves through the passage formed by the mould cavity.

The sidewalls 15 are substantially identical in design. Each side wall comprises two main parts, namely a parallelepiped graphite slab or block 17 one face of which, the inner face 17A, is directed toward the mould cavity C and the opposite or outer face 17B of which is directed away from the mould cavity, and a backing plate 18 which is secured to the mounting blocks M and supports and protects the graphite block 17. The backing plate 18 covers the entire outer face of the graphite block 17 and also engages the ends thereof. The graphite block 17 and its construction is unique and will be described in detail below, whereas

the backing plate 18 may be of a substantially conventional design and need not be further described.

In operation of the illustrated continuous-casting apparatus, the mould 10 is
5 oscillated at least in the vertical direction, that is, in the direction of movement of
the metal being cast as is indicated by a double arrow OV in Fig. 3. Preferably,
it is also oscillated horizontally as indicated by a double arrow OH so that there
is a horizontal oscillatory relative movement of the mould 10 and the tundish
parallel longitudinal direction of the mould entrance opening E. The oscillation
10 or oscillations may be effected by any suitable mechanism. Several types of
mechanisms for mould oscillation are known in the continuous-casting art.

Since the tundish 11 constantly rests on the sealing element 14A, it has to have
some movability in the vertical direction relative to the frame of the casting
15 apparatus to allow the vertical oscillations without the sealing element 14A
losing its sealing effect. Horizontal oscillations can be accommodated by the
horizontal sliding movements of the mould 10 and the tundish 11 relative to one
another that are readily permitted by the sealing member 14A.

20 Associated with each sidewall 15 is a cooling system, which is largely
conventional except for a part thereof. That part is included in the graphite block
17 and comprises an array of parallel, coolant tubes 19 of metal, such as
copper. Other parts (not shown) of the system include means incorporated in
the backing plates 18 for passing a liquid coolant through the coolant tubes 19
25 in the graphite block 17. As shown in the drawings, the tubes extend
horizontally - that is, transversely to the direction in which the cast metal moves
through the mould cavity C - between opposite ends of the graphite block 17
along a vertical plane approximately centrally between the vertical large faces of
the graphite blocks 17.

30 The graphite block 17 of each side wall 15 is formed of a large number of thin
strip-like rectangular elongate, thin (thickness e.g. about 1 mm) graphite sheets

or laminae 20 which are stacked with their broad surfaces or faces in engagement with one another and their narrow longitudinal surfaces or edges jointly forming the broad sides or faces of the parallelepiped slab-like straight stack or graphite block 17 so formed. The inner face 17A of the graphite block
 5 17 mounted in the mould 10 forms one of the sides of the mould cavity C.

Preferably, the laminae 20 are made from flaky graphite, that is, graphite made up essentially of compacted flakes which are oriented such that they extend in planes substantially parallel to the faces of the graphite sheets from which the
 10 laminae are cut. Graphite sheets (foils and plates) of that kind are readily available as commercial products. A particular attraction of such graphite sheets is that their thermal conductivity in directions parallel to the faces is considerably better than their thermal conductivity perpendicular to the faces. Examples of commercially available graphite sheet products that are suitable for
 15 the graphite block 17 are marketed by Sigr Elektrografit GmbH, Meitingen bei Augsburg, Germany, under the designations SIGRAFLEX-F (foils) and SIGRAFLEX-L (plates).

To achieve as favourable heat conducting properties as possible, it is desirable
 20 that the density of the graphite making up the laminae be as high as possible. It may be advantageous, therefore, to increase the density of the commercially available sheets of flaky graphite by subjecting the sheets, or the laminae cut from them, to a densifying treatment, such as by rolling, before the stacks are formed.

25 Before the graphite block 17 is formed by stacking the laminae 20, apertures are formed, e.g. punched, in the laminae to allow for reception of the coolant tubes 15. The size of the apertures should be accurately matched with the size of the coolant tubes 19 so that a snug fit of the tubes in the apertures is
 30 achieved. Such a fit is essential to obtain an efficient heat transfer from the graphite to the liquid coolant flowing in the coolant tubes.

A convenient procedure for forming the stack from the apertured laminae 20 is to secure one end of the coolant tubes 19 to an end member (not shown), preferably a rectangular metal plate of approximately the length and width of the laminae 20, such that the tubes extend in accurately parallel relation, and then
5 sliding the lamina 20 over the opposite ends of the tubes and pushing them along the tubes until they are in face-to-face engagement with one another. When all laminae 20 required to form the stack have been added, a similar end member is applied to the stack and pressure is applied in opposite directions through the end members to compact the stack and the laminae 20 forming the
10 stack. Such compaction enhances the contact of the laminae with the coolant tubes 19 and thereby promotes the heat transfer from the laminae 20 to the coolant flowing in the tubes.

Following the above-described assembly of the graphite block 17 with the
15 coolant tubes 19 accommodated in it, the large faces 17A, 17B of the graphite block are machined, such as by milling, so that the graphite block is reduced to the proper accurate dimensions and will have smooth surfaces. The block 17 so finished block is then mounted to its backing plate 18, whereupon the side wall
15 formed by the graphite block 17 and the backing plate 18 is installed in the
20 casting machine.

In the installed position of the side and end walls 15, 16, the flat, horizontal upper end surfaces of the blocks 17 and the end walls 16 form the top surface 10A which extends about the mould entrance opening E. The top surface 10A
25 supports a flat sealing element 14A, which in operation of the continuous-casting apparatus forms the sealing device 14 together with the mould surface 10A and the tundish surface 11A, opposite sides of the sealing element 14 then being in sealing engagement with these surfaces.

30 The sealing element 14A is fabricated from a graphite sheet material similar to or identical with the graphite sheet material from which the laminae 20 of the graphite block 17 are made. In the illustrated embodiment the sealing element

14A comprises only a single sheet or layer, but it may alternatively comprise a plurality of superposed sheets or layers.

5 Naturally, the sealing element 14A has to be mounted on the top surface 10A or, alternatively, the bottom surface 11B of the tundish 11 such that in operation of the casting apparatus the sealing member will be retained in the proper sealing position with its faces in sealing engagement with the mould surface 10A and the bottom surface 11B of the tundish 11. Several methods and means for retaining the sealing element 14A in the proper position are feasible. The
10 presently preferred retaining means is that illustrated in Fig. 1A and comprises a frame 14B, e.g. of copper, which is secured to the top surface 10A of the mould 10 to confine and retain the sealing element 14A.

As indicated above, the sealing device 14 may comprise a plurality of sealing
15 elements similar to the illustrated sealing element 14A. For example, in addition to the illustrated sealing element 14A positioned on the top surface 10A of the mould 10 a similar sealing element may be provided and fastened to the bottom surface 11B of the tundish 11 so that in operation it will slidably and sealingly engage the first-mentioned sealing element 14A.

20 In the illustrated embodiment, the tundish 11 is positioned in a recess formed between the upper portions of the mould surface walls 15. This positioning of the tundish is of no particular significance in the context of the invention.

Claims

1. Apparatus for continuous vertical casting of metal strips, comprising
a mould (10) having top and bottom ends an open-ended mould cavity (C)
5 with a mould entrance opening (E) at the top end and a strip exit opening at the
bottom end,
a tundish (11) for holding molten metal, said tundish having a discharge
opening (11A) in direct communication with the mould cavity (C) to feed molten
metal into the mould entrance opening (E) past an interface between the
10 tundish (11) and the mould (10),
a sealing device (14) forming a seal at said tundish-mould interface to
prevent molten metal from entering said interface, and
a molten-metal feeding device (12) for supplying molten metal to the
tundish (11) and maintaining a level of molten metal therein,
15 **characterised** in that said sealing device (14) comprises
an upwardly facing horizontal flat sealing element support surface (10A)
on the mould (10) at the top end thereof, said sealing element support surface
(10A) extending about the mould entrance opening (E),
a flat downwardly facing surface (11B) on the tundish, said downwardly
20 facing surface (11B) extending about the discharge opening (11A) of the
tundish, and
a sealing element (14A) formed of a sheet of graphite and being in
constant sealing engagement with both said horizontal sealing element support
surface (10A) on the mould (10) and said downwardly facing surface (11B) of
25 the tundish (11), said sealing element (14A) extending about the mould
entrance opening (E) and the discharge opening (11A) of the tundish (11).
2. Apparatus according to claim 1, wherein the mould (10) comprises a pair
of side walls (15), each side wall comprises a vertical graphite block (17) formed
30 from a stack of elongate graphite laminae (20) and one end of said block forms
part of said sealing element support surface (10A) of the mould.

3. Apparatus according to claim 2, wherein the graphite laminae (20) of the stack extend from the entrance opening (E) of the mould cavity (C) to the exit opening and wherein said part of the sealing element support surface (10A) on the mould (10) is formed by the ends of the laminae.

5

4. Apparatus according to claim 3, wherein a plurality of coolant tubes (19) extend horizontally through the graphite block (17) through apertures formed in the graphite laminae (20).

10 5. Apparatus according to any one of claims 1 to 4, wherein the mould (10) further comprises a pair of end walls (16) of graphite which bridge gaps between the side walls (15), said end walls having flat horizontal upper end faces which are level with said one end of each of said graphite blocks (17) and form parts of said sealing element support surface (10A) on the mould.

15

6. Apparatus according to any one of claims 1 to 5, wherein said downwardly facing surface (11B) of the tundish (11) is slidable with respect to the sealing element (14).



Abstract

Apparatus for continuous vertical casting of metal strips, comprising: a mould (10) having top and bottom ends an open-ended mould cavity (C), a tundish (11) having a discharge opening (11A) in direct communication with the mould cavity (C) to feed molten metal into a mould entrance opening (E) past an interface between the tundish (11) and the mould (10); a sealing device (14) forming a seal at said tundish-mould interface to prevent molten metal from entering said interface, and a device (12) for supplying molten metal to the tundish (11) and maintaining a level of molten metal therein. The sealing device (14) comprises a pair of flat horizontal surfaces (10A, 11B), one on the mould around the entrance opening (E) and one on the tundish (10) around the discharge opening (11A), and a sealing element (14A) formed of a sheet of graphite and being in constant sealing engagement with both said surfaces (10A, 11B).

(Fig. 1)

U.S. Pat. 3,800,000
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025

FIG. 1

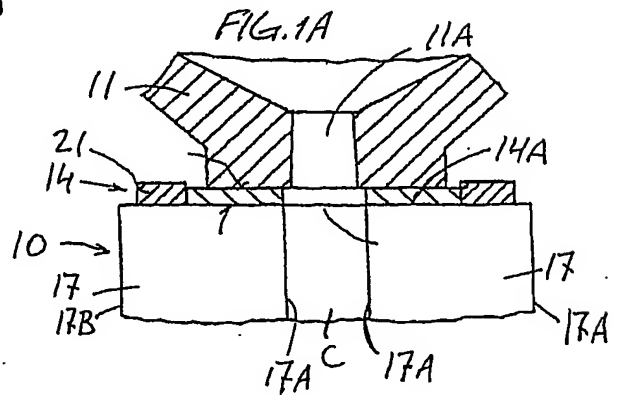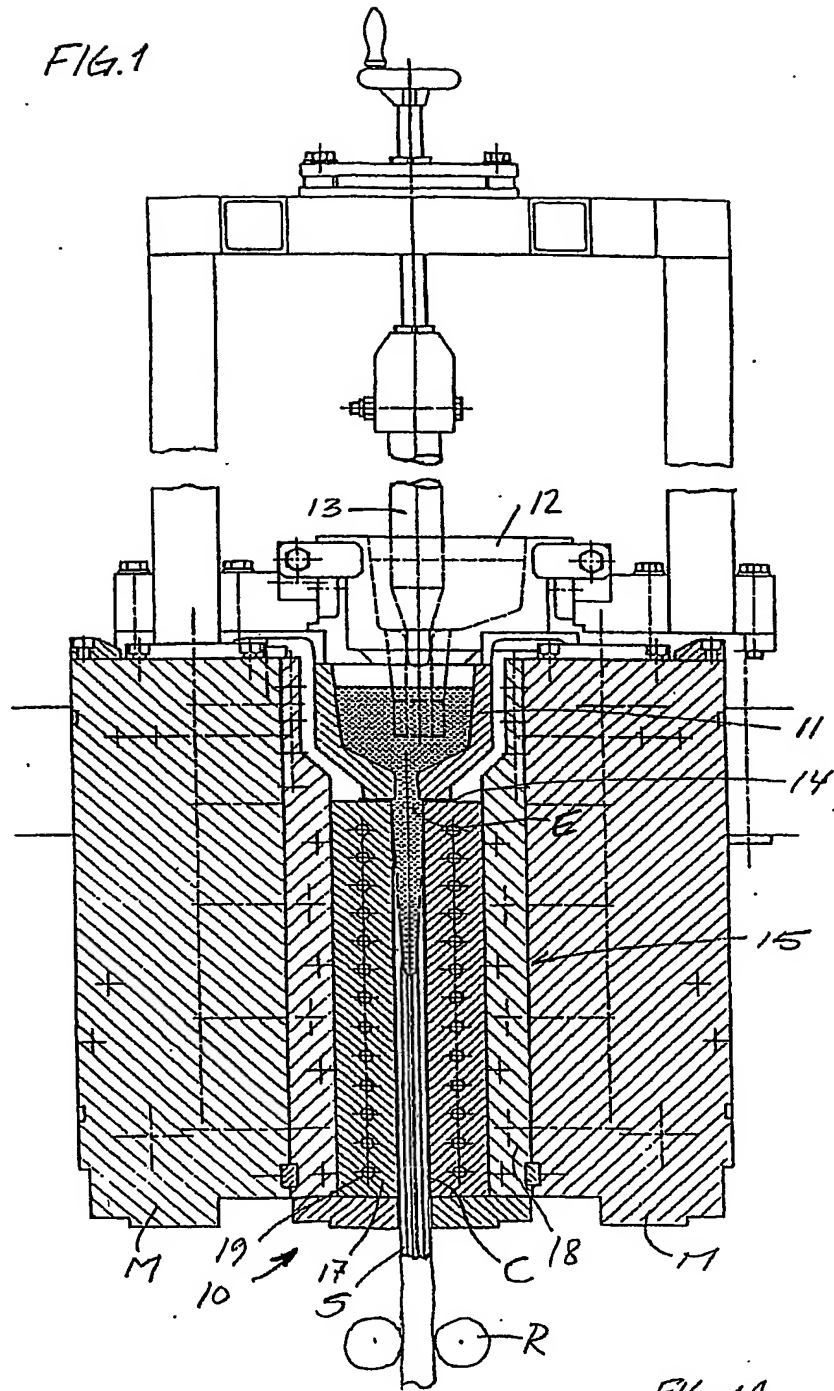

2/2

FIG. 2

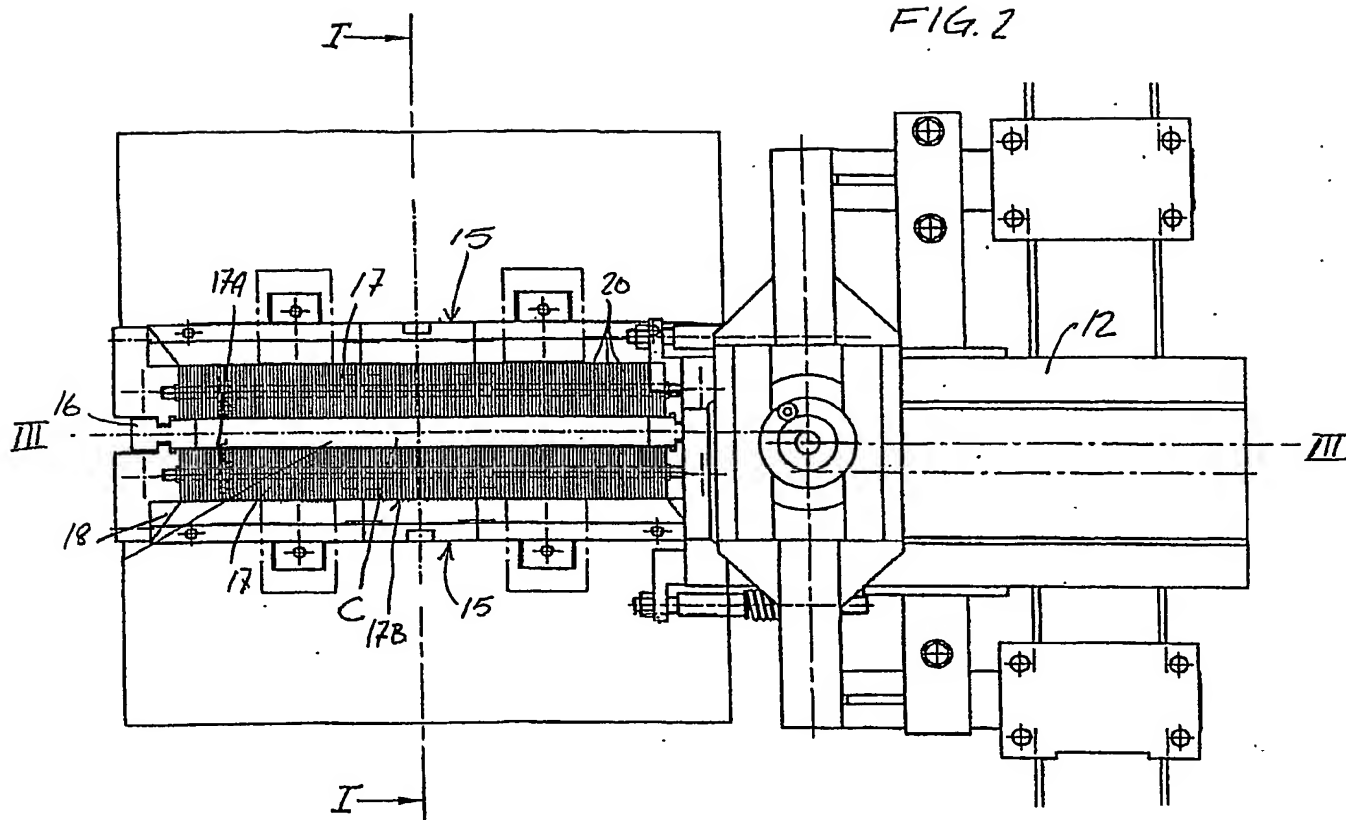


FIG.3

